

# GLOBE STAR

## STANDARD

WELL SUITED FOR ALL  
REGULAR WORKING CONDITIONS

A three-stage solid tire that performs better than expectations. It has a proven block tread profile and a formulated soft center core that provides a soft ride and reduces driver fatigue. GLOBESTAR tires run with reduced heat buildup and energy efficient lower rolling resistance.



**Low**  
rolling resistance

**Extended**  
tire life

**Better**  
heat dissipation

## GLOBESTAR will convince you...

The natural rubber compound, the large contact area and the scuff bar provide for;


- Increased resilience and high tensile strength
- Lower rolling resistance
- Reduced heat buildup
- Increased reliability and safety
- Better protection against side impact damage



**Non Marker**



**Black**

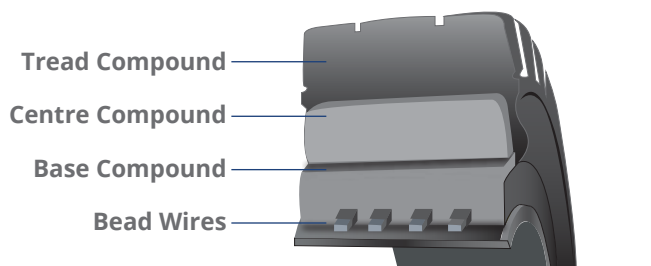

## ...that you made the right decision.

With better handling and a functional design, GLOBE STAR is built for electric as well as internal combustion engine forklifts for regular material handling applications. It is available in all sizes, in non-marking, smooth and clip-type tires. GLOBESTAR tires are reinforced with creel bead wires to ensure secure wheel and rim fitment.



## Technical Data

Tire Size	Rim Size	Clip on	Tire Dimensions				Max. forklift Trucks Load Capacity				Other Vehicles load capacity (Kg)		Profile	
			Max width ±1% (mm)	OD ± 2% (mm)	Max width ±1% (inch)	OD ± 2% (Inch)	Lbs at 16 Miles/hr		Kgs at 25 Km/hr		6 Km/h	10 Km/h		
							Load Wheel	Steer Wheel	Load Wheel	Steer Wheel				
4.00-4	2.10 -4		99	304	3.90	11.97	1180	910	535	412	535	485	GS	
4.00-4	2.50 C-4		99	304	3.90	11.97	1180	910	535	412	535	485	GS	
4.00-8	3.00 D-8	•	105	406	4.13	15.98	2095	1610	950	730	950	860	GS	
5.00-8	3.00 D-8	•	116	446	4.57	17.56	3120	2405	1415	1090	1415	1285	GS	
5.00-8	3.00 D-8		116	446	4.57	17.56	3120	2403	1415	1090	1415	1285	SM	
5.00-8	3.75-8		153	448	6.02	17.64	3308	2547	1500	1155			RIB	
15x4 1/2-8	125/75-8	3.00 D-8	•	103	377	4.06	14.84	2295	1765	1040	800	1040	945	GS
16x6-8	150/75-8	4.33 R-8	•	139	407	5.47	16.02	3210	2535	1455	1150	1495	1360	GS
18x7-8	180/70-8	4.33 R-8	•	153	451	6.02	17.76	4730	3640	2145	1650	2145	1945	GS
6.00-9	4.00 E-9	•	140	520	5.51	20.47	4155	3195	1885	1450	1885	1710	GS	
6.00-9	4.00 E-9		140	520	5.51	20.47	4156	3197	1885	1450	1885	1710	SM	
6.00-10 (21x7-10)	5.00 F-10		160	520	6.30	20.47	4690	3605	2127	1635	2127	1930	SM	
21x8-9	200/75-9	6.00 E-9	•	174	516	6.85	20.31	6075	4675	2755	2120	2755	2505	GS
6.50-10	5.00 F-10	•	153	565	6.02	22.24	5160	3970	2340	1800	2340	2125	GS	
200/50-10	6.50 F-10	•	187	455	7.36	17.91	5445	4190	2470	1900	2470	2240	GS	
23x9-10	225/75-10	6.50 F-10	•	191	579	7.52	22.80	7595	5840	3445	2650	3445	3125	GS
7.00-12	5.00 S-12	•	164	647	6.46	25.47	6435	4940	2920	2240	2920	2645	GS	
23x10-12	8.00 G-12	•	234	578	9.21	22.76	8310	6390	3770	2900	3770	3420	GS	
27x10-12	250/75-12	8.00 G-12	•	232	673	9.13	26.50	8600	6615	3900	3000	3900	3540	GS
7.00-15	5.50-15	•	178	705	7.01	27.76	7815	6005	3545	2725	3545	3215	GS	
7.00-15	6.00-15	•	178	705	7.01	27.76	7815	6005	3545	2725	3545	3215	GS	
8.15-15 (28x9-15)	225/75-15	7.00-15	•	209	681	8.23	26.81	8310	6390	3770	2900	4750	4300	GS
8.25-15	5.50-15		194	809	7.64	31.85	10470	8045	4750	3650	4750	4300	GS	
8.25-15	6.50-15	•	193	809	7.60	31.85	10470	8045	4750	3650	3900	3540	GS	
250-15	250/70-15	7.00-15	•	214	712	8.43	28.03	10470	8045	4750	3650	4750	4300	GS
250-15	250/70-15	7.50-15	•	214	712	8.43	28.03	10470	8045	4750	3650	4750	4300	GS
300-15	315/70-15	8.00-15	•	244	812	9.61	31.97	12895	9920	5850	4500	5850	5310	GS
355/65-15	9.75-15	•	291	826	11.46	32.52	17190	13230	7800	6000	7000	6430	GS	
6.50-16	5.50-16		176	735	6.93	28.94	5733	4410	2600	2000			SM	
9.00-20	6.50-10		225	971	8.86	38.23	11770	9810	5340	4450	5340	5200	GS	
9.00-20	7.00-20		225	971	8.86	38.23	11770	9810	5340	4450	5340	5200	GS	
10.00-20	7.00-20		250	1006	9.84	39.61	13230	11025	6000	5000	6000	5450	GS	
10.00-20	7.50-20		250	1006	9.84	39.61	13230	11025	6000	5000	6000	5450	GS	
10.00-20	7.50-20		254	1025	10.00	40.35	13230	11025	6000	5000	6000	5450	SM	
10.00-20	8.00-20		250	1006	9.84	39.61	13230	11025	6000	5000	6000	5450	GS	
12.00-20	8.00-20		265	1085	10.43	42.72	16535	13780	7500	6250	7500	6810	GS	
12.00-20	8.50-20		265	1085	10.43	42.72	16535	13780	7500	6250	7500	6810	GS	

### LIMITED WARRANTY

All tires manufactured by Global Rubber Industries (Pvt) Ltd. are covered under limited warranty against materials, workmanship and any other manufacturing defects subjected to the usage of these tires under specified conditions. If any tire covered by this warranty is identified as unserviceable tire due to a material / workmanship /any other manufacturing defect, we will either repair the tire or make an allowance on purchase of new tire as per the current price of a new tire by the percentage of original tread worn off at the time of making the claim.

The cost of transportation, service, and sales tax already paid will be borne by the owner of the claimed tire. This limited warranty is made for the exclusive benefit of the tire owner actually using the product. No other warranty of liability, expressed or implied, is applicable to this limited warranty or to our products.

